

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/093789 A1

(51) International Patent Classification⁷: **H01L 21/00**
(21) International Application Number:
PCT/EP2004/014167

(22) International Filing Date:
10 December 2004 (10.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03293095.0 10 December 2003 (10.12.2003) EP

(71) Applicant (for all designated States except US):
FREESCALE SEMICONDUCTOR, INC. [US/US];
6501 William Cannon Drive, Austin, TX 78735 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **AMIENS, Catherine** [FR/FR]; 9 Rue Arzac, F-31300 Toulouse (FR).
CHAUDRET, Bruno [FR/FR]; 56, rue des Roseaux,
Appt. E2, F-31400 Toulouse (FR).


(74) Agent: **WHARMBY, Martin, A.**; c/o Impetus IP Ltd,
Grove House, Lutyens Close, Chineham Court, Bas-
ingstoke, Hampshire RG24 8AG (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF PRODUCING AN ELEMENT COMPRISING AN ELECTRICAL CONDUCTOR ENCIRCLED BY
MAGNETIC MATERIAL

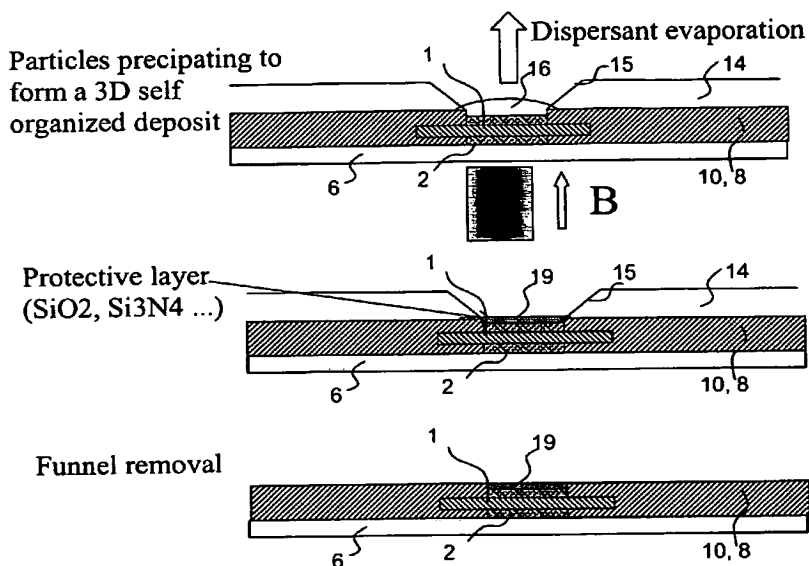

(57) Abstract: A method of producing an electrical inductor circuit element comprising an elongate electrical conductor (1) encircled by magnetic material (2) extending along at least a part of the conductor. First (10) and second (7) sacrificial layers are formed across the conductor (1) respectively above and below the conductor, at least parts of the sacrificial layers (7, 10) are removed to leave a space (12) encircling the conductor, a fluid (16) comprising magnetic nanoparticles dispersed in a liquid dispersant is introduced into the space (12), and the dispersant is removed leaving the magnetic nanoparticles densely packed in the space (12) as at least part of the magnetic material (2).



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.